

ULYS 1.10SW

Storage server with 2nd Gen Intel® Xeon® Scalable Processors

ULYS 1.10 is a 1U storage server that can meet all your storage needs.

DESIGN PRINCIPLES

- I/O options for accelerated computing.
- Increased efficiency, accelerated performance.
- High-end storage server.
- Tool-less and lockable 2.5" drive trays.



TOP APPLICATIONS



Storage



Big Data

KEY BENEFITS

- Easy maintenance
- Compact and powerful
- Simple to specify


KEY FEATURES

Unique solution which supports :


- 2nd Gen Intel® Xeon® Scalable Processors
- Single Socket P (LGA3647)
- Dual LAN Ethernet
- Up to 1.5TB 3DS ECC LRDIMM, DDR4-2933MHz, in 6 DIMM slots
- Aspeed® AST2500 remote management controller

OVERVIEW

FRONT VIEW

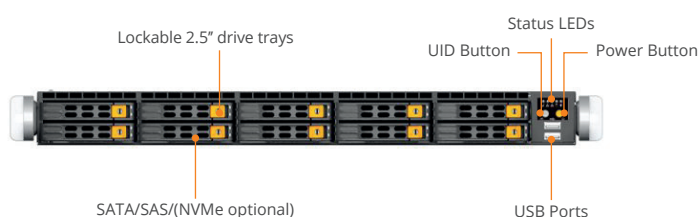

REAR VIEW

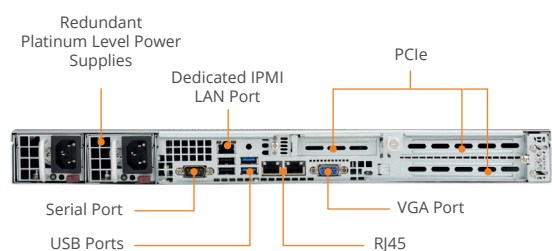

SPECIFICATIONS

System

Model	ULYS 1.10SW
Form Factor	1U
Dimension	597 x 437 x 43 23.5" x 17.2" x 1.7" (D x W x H)
Sled	-
Weight	15 kg 33 lbs

Storage

Front type	10x hot-swap 2.5" SATA/SAS/(NVMe optional)
Rear type	-

Motherboard

CPU	2nd Gen Intel® Xeon® Scalable Processors and Intel® Xeon® Scalable Processors
Chipset	Intel® C622
Expansions slots	2x PCIe 3.0 x16 (FHFL) 1x PCIe 3.0 x8 (LP)
M.2 connector	1x M.2 PCIe 3.0 x4 and SATA
Network	Up to 2x 10GbE base-T

Processors

Socket type	Single Socket P (LGA3647)
Supported CPU	2nd Gen Intel® Xeon® Scalable Processors and Intel® Xeon® Scalable Processors
TDP	Up to 205W

Memory

Quantity	6x DIMM slots
Capacity	Up to 1.5TB 3DS ECC DDR4-2933MHz RDIMM/LRDIMM
Speed	2933/2666/2400/2133MHz ECC DDR4 RDIMM/LRDIMM
Channels	6x channels per CPU

Server management

BMC	IPMI 2.0 with KVM support
Chipset	Aspeed® AST2500
TPM	TPM Header for SPI interface

Front I/O

Button	1x Power 1x System reset
LED	2x Network activity 1x Power status 1x HDD activity 1x System Overheat LED / Fan fail LED / UID LED
Port	2x USB

Back I/O

Button	-
LED	1x UID
Port	4x USB 2x RJ45 Ethernet 1x COM 1x VGA 1x IPMI

Internal connector

Port	-
-------------	---

System Cooling

Fans	4x fans (2 more can be added in option)
-------------	---

Power Input

Type	700W/750W Redundant Power Supplies 80+ Platinum certified
Input Range	100 - 140Vac / 8 - 6A / 50 - 60Hz 200 - 240Vac / 4.5 - 3.8A / 50 - 60Hz 200 - 240Vdc / 4.5 - 3.8A (CCC Only)
DC Output	700W: +12V Max: 58A / +5V sb Max: 3A 750W: +12V Max: 62A / +5V sb Max: 3A

Operating Environment

RoHS	RoHS compliant
Temperature	Operating temperature: 10°C to 35°C Non-operating temperature: -40°C to 60°C
Humidity	Operating humidity : 8-90% (non-condensing) Non-operating humidity : 5-95% (non-condensing)